



Submitted Model No.: _____

Specific Features: _____

Mounting without escutcheon plate:

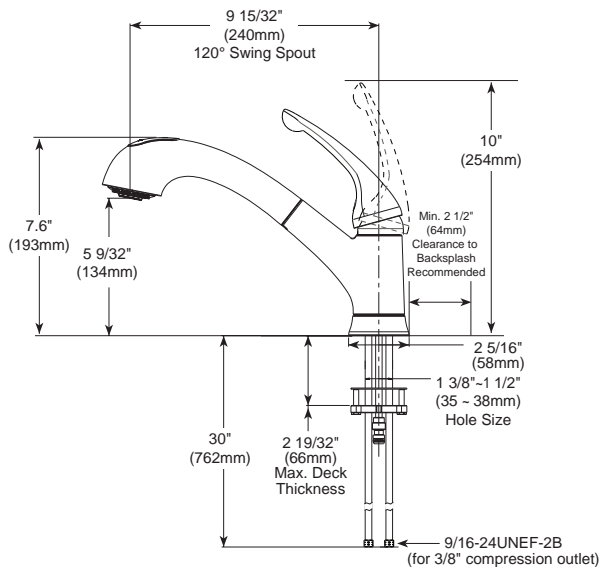

Mounting with escutcheon plate:

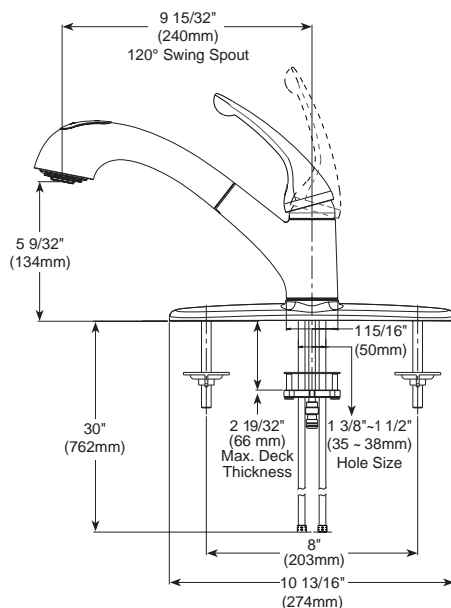

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-K-469LF



KITCHEN FAUCETS

- Single Handle Deck Mount
- Single or 3 Hole Sink Applications
- 2-Function Pull-Out
- Integrated Flexible Supply Lines

STANDARD SPECIFICATIONS:

- Centermount or 8" (203 mm) centers with optional escutcheon included.
- Optional escutcheon (RP32521). Order separately.
- 9 15/32" (240.2 mm) long pull-out spout swings 120° and operates in either spray or aerate mode. Spout is connected to valve body with a 42" (1067 mm) hose.
- All operating parts shall be replaceable from the top.
- 30" (762 mm) flexible supply lines included.
- Lever handle control mechanism is the rotating stainless steel ball type with replaceable non-metallic seats.
- Control button shall return to neutral position when valve is turned off.
- Integral double check valves in spout.
- 3/8" female compression adaptors.
- Touch-Clean® spray head.
- Max. flow rate 1.8 gpm @ 60 psi (6.8 L/min @ 414 kPa)


WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH:

- CSA certified
- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations.

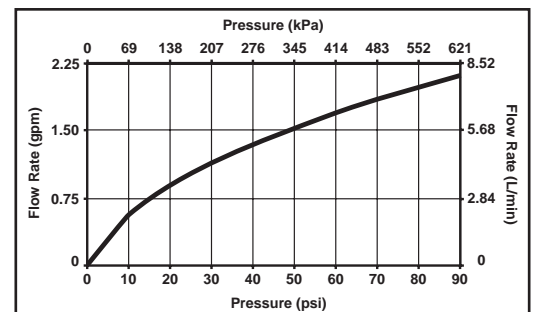

55 E. 111th Street, Indianapolis, Indiana 46280
 350 South Edgware Road, St. Thomas, ON N5P 4L1
 © 2015 Masco Corporation of Indiana



BLANCO HORIZON™ U 2

Stainless Steel, Undermount Sink

BLANCO HORIZON™ Stainless Steel sinks are engineered to precise specifications for quality and performance, offering unmatched value.

BLANCO

Model No.	Bowl Depth	
	Main	Secondary
401022	7" (178 mm)	7" (178 mm)
401234	8" (205 mm)	8" (205 mm)

Material

Premium 304 series, 18 gauge (8" bowl depth sink) and 20 gauge (7" bowl depth sink) stainless steel with 18/10 chrome-nickel content for excellent durability and corrosion resistance

Refined brushed finish

Specifications

Undermount installation

Minimum Cabinet Size: 33" (840 mm)

Rear positioned drain holes for maximum usable bowl and cabinet storage

One-piece construction; no seam

3½" (90 mm) stainless steel strainers included

Recessed partition for overflow reduces the potential for spills

Easy-to-use cut-out template included


Limited Lifetime Warranty



Recommended Accessories



BLANCO
CapFlow™ Strainer
Cover
517666
Stainless Steel



Magnetic Caddy
230694
Stainless Steel



BLANCO CLEAN
406201
Stainless steel sink
cleaner

Specifications:

- Fire Clay
- Rear overflow
- Template supplied
- Faucet not included



Overall Dimensions:

515mm (W) x 440mm (D) x 190mm (H)
20¼" (W) x 17⅜" (D) x 7½" (H)

Shipping:

Cube 1.87
GW 27 lbs

Compliance Certifications:

Meets or exceeds the following specs:

- IAPMO cUPC
- ASME A112.19.2 / CSA B45.1-2008



Item to be specified:




Soft White:

☐ **13-0039-4W** (4" Center)

UPC: 721015415824



☐ **13-0039-8W** (8" Center)

UPC: 721015415831

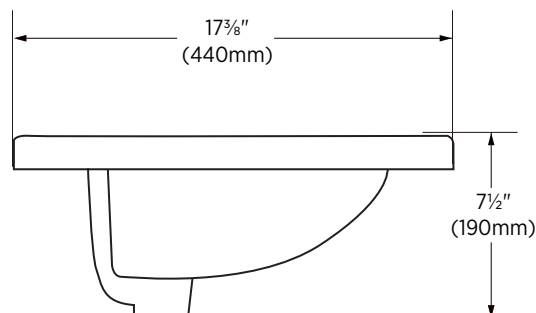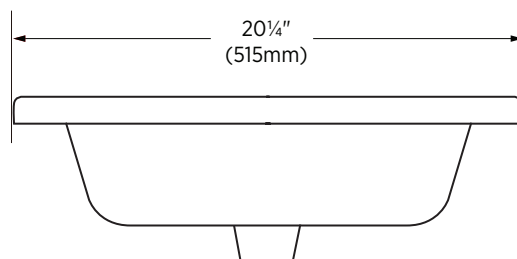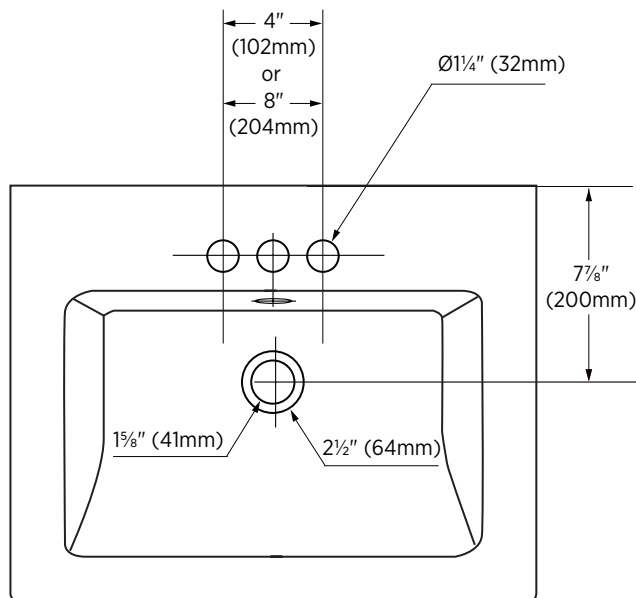


Notes:

Important: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

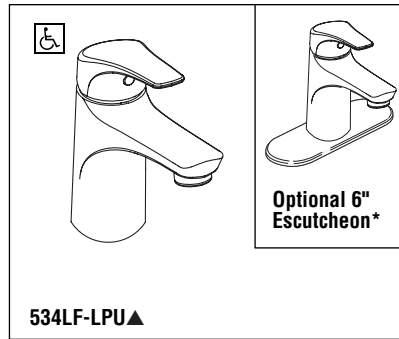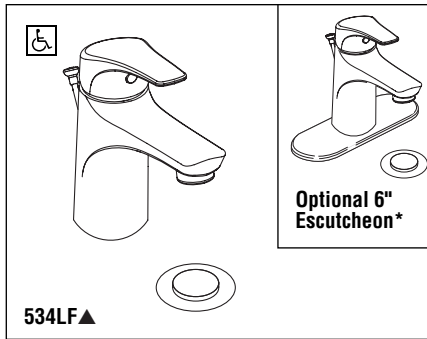

Submitted Model No.: _____

Specific Features: _____

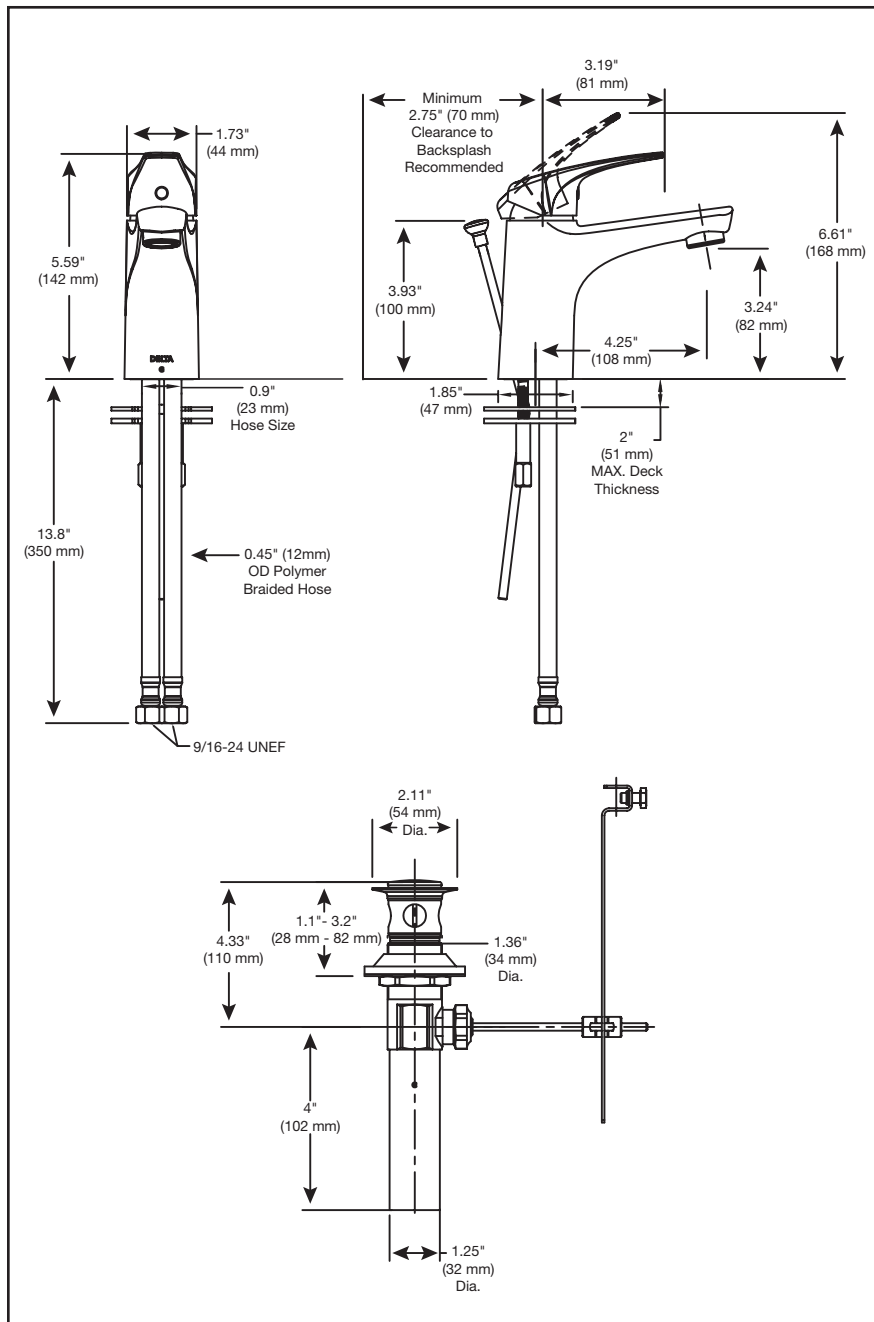

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-L-534LF



LAVATORY FAUCETS

- Wynne™ Collection
- Single Handle Deck Mount
- 1 or 3 Hole Sink Applications

STANDARD SPECIFICATIONS:

- Single Handle Lavatory Faucet.
- Ceramic cartridge with high temperature rotational limit stop.
- Cast centerset with 50/50 pop-up.
- 1 or 3 hole sink applications.
*Order RP47973 6" optional escutcheon plate for 3-hole sinks installation – Not included.
- Models with suffix "LPU" are less pop-up.
- 4.25" (108 mm) long reach on spout.
- Maximum 2" (51 mm) deck thickness.
- Handle: 3.19" (81 mm) lever handle – ADA compliant-colour indexed.
- Maximum flow rate: 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa.


WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH:

- CSA certified
- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2 – 534LF▲ only
- Indicates ADA compliance to ICC/ANSI A117.1
- EPA WaterSense – 534LF▲ & 534LF-LPU▲ only
- Verified compliant with 0.25% weighted average Pb content regulations.

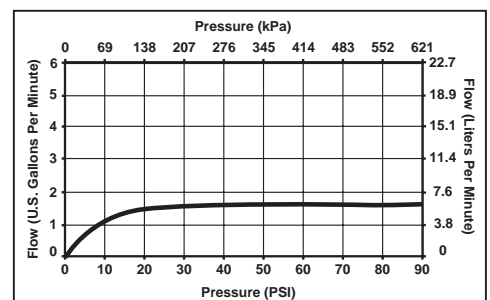

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2014 Masco Corporation of Indiana

CAPRICE

PEDESTAL LAVATORY

- ☐ 4313DMX Basin with Single Hole
- ☐ 4343DMX Basin with 4" Center
- ☐ 4383DMX Basin with 8" Center
- ☐ 4344DMX Pedestal Leg

Product Specs:

- Vitreous china
- Rear overflow hole
- Single hole, 4" or 8" faucet center
- Supplied with mounting hardware
- Faucet not included

Overall Dimensions:

580mm(W) x 482mm(D) x 865mm(H)
 22¾"(W) x 19"(D) x 34"(H)

Compliance Certifications:

- Meets or exceeds the following:
- IAPMO cUPC
 - ASME A112.19.2 / CSA B45.1-2013

Shipping:

Basin 2.36 cube
 43 lbs (GW)

Leg 0.8 cube
 24 lbs (GW)




Colours To Be Specified:

- Colour: ☐ Soft White
☐ Bone (055)*
☐ Biscuit (066)*


Notes:


Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

*Bone and Biscuit available through Direct import (CIF) only.



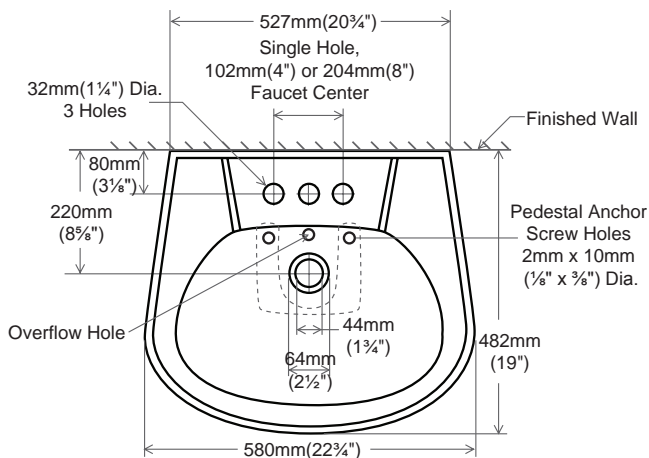


Note:
 ▲ Dimensions shown for location of supplies and waste are suggested.
 *Actual dimensions must be taken from fixture.

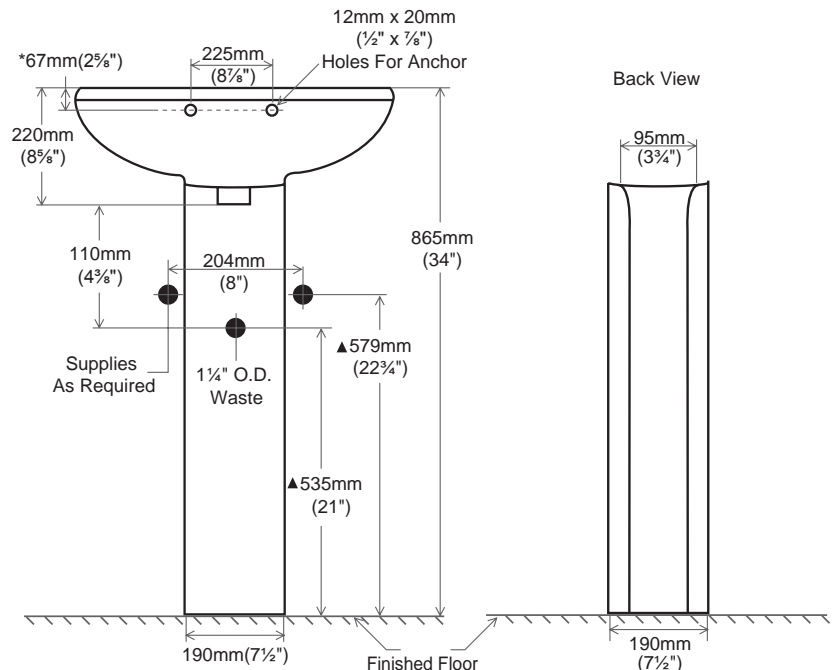

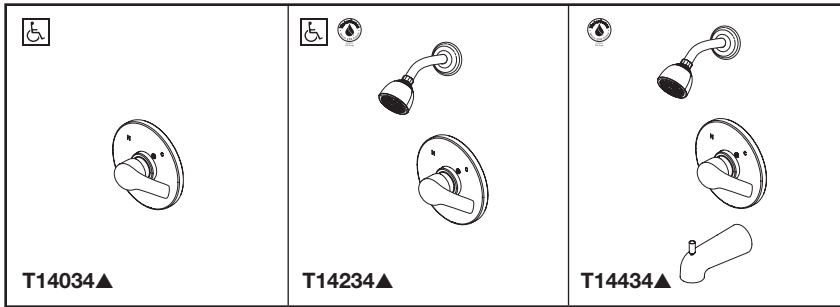

Submitted Model No.: _____
 Specific Features: _____

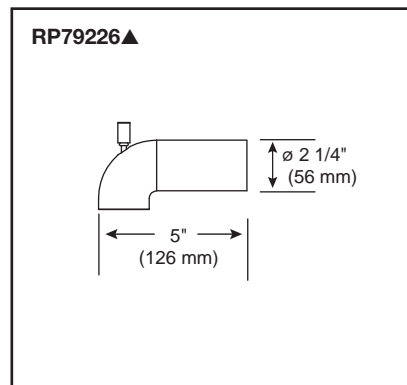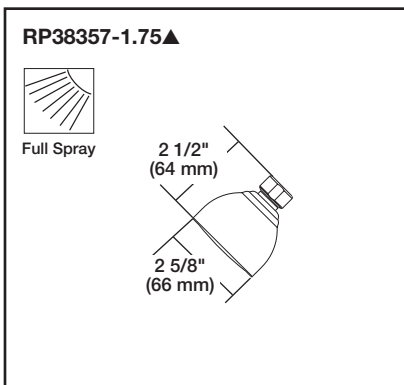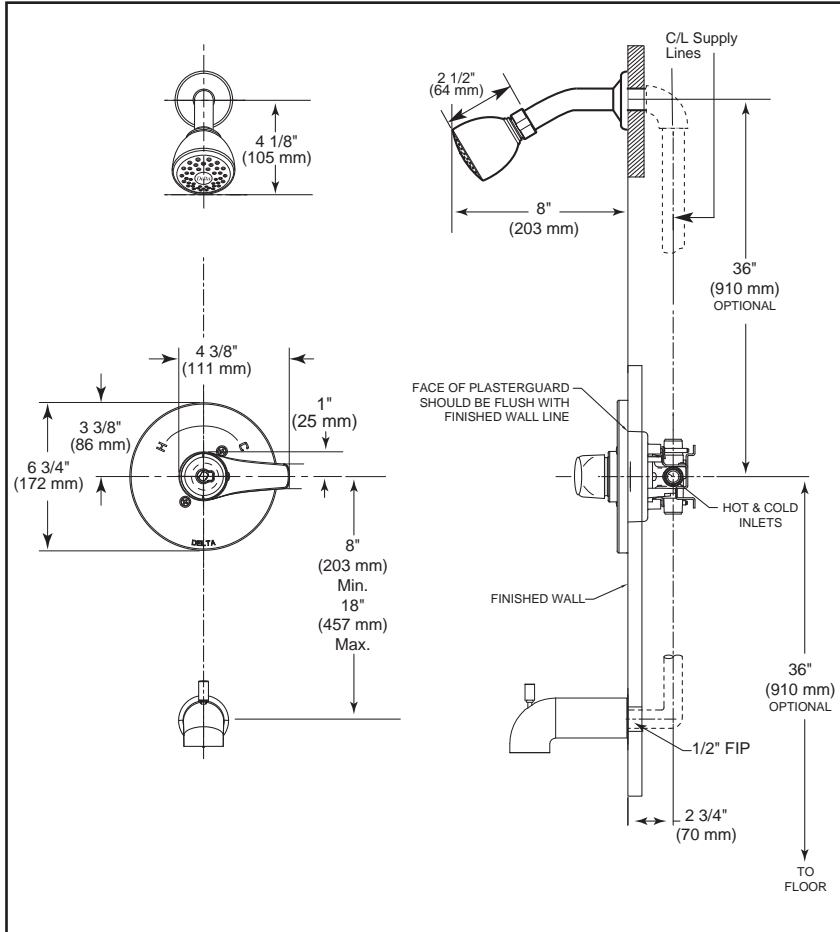

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-B-T14034



TUB AND SHOWER FAUCET TRIM

- Wynne™ Collection
- Valve Only Trim (T14034 Series)
- Shower Only Trim (T14234 Series)
- Tub/Shower Trim (T14434 Series)
- Single Handle

STANDARD SPECIFICATIONS

- Monitor 14 Series pressure balanced bath mixing valve with Scald-Guard®.
- Back-to-back installation capability.
- Field adjustable to limit handle rotation into hot water zone.
- 120° maximum handle rotation.
- For use with MultiChoice® Universal rough valve body. (R10000 Series)
- All parts replaceable from the front of the valve.
- Temperature only controlled with handle.
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- 1/2" -14 threaded tub spout.
- Maximum flow rate of showerhead: 1.75 gpm @ 80 psi (6.6 L/min @ 552 kPa).


WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the Original consumer purchaser to be free from defects in material and workmanship
- 5 year limited warranty for usage in all industrial, Commercial and business applications.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016-P
- CSA Certified
- EPA WaterSense® (T14234 and T14434 models only)
- Indicates compliance to ICC/ANSI A117.1 – (T14034 and T14234 models only)

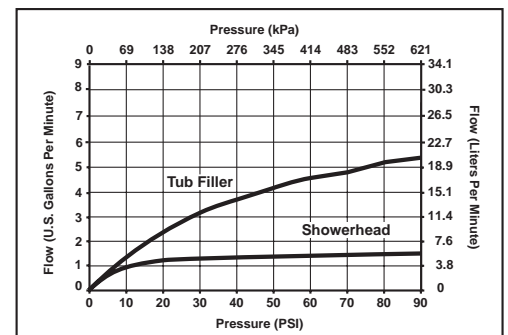

55 E. 111th Street, Indianapolis, Indiana 46280
 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2
 © 2014 Masco Corporation of Indiana

CARLIN®

4.8Lpf / 1.28Gpf 2PC ROUND FRONT REGULAR HEIGHT

- | | |
|-----------------------------------|---------------------|
| <input type="checkbox"/> 4722BFV | Bowl |
| <input type="checkbox"/> 4721BFV | Lined Tank |
| <input type="checkbox"/> 4721BFVU | Unlined Tank |

Product Specs:

- High efficiency toilet
- 4.8Lpf / 1.28Gpf
- Round front bowl
- Vitreous china
- 15½" Bowl height
- Chrome tank lever
- 12" (305mm) Rough-in
- 2" Fully glazed ball pass trapway
- 3" Flapper
- Siphon jet flush action
- Water surface (209mm x 155mm) 8¼" x 6⅞"
- Toilet seat not included

Overall Dimensions:

440mm(W) x 670mm(D) x 765mm(H)
17¼"(W) x 26⅝"(D) x 30⅞"(H)

Compliance Certifications:

Meets or exceeds the following:

- IAPMO cUPC
- US EPA WaterSense
- ASME A112.19.2 / CSA B45.1-2013
- MaP tested 1000g
- LEED Compliant

Shipping:

Tank	1.93 cube 34 lbs (GW)
Bowl	3.38 cube 46 lbs (GW)




Notes:

The drawing below shows a rough-in at a minimum dimension of 305mm (12") from finished wall to C/L of outlet. Supply line not included with fixture and must be ordered separately. Important: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.


***For additional component options and specifications, please visit www.contrac.ca**

*Bone and Biscuit available through Direct import (CIF) only.

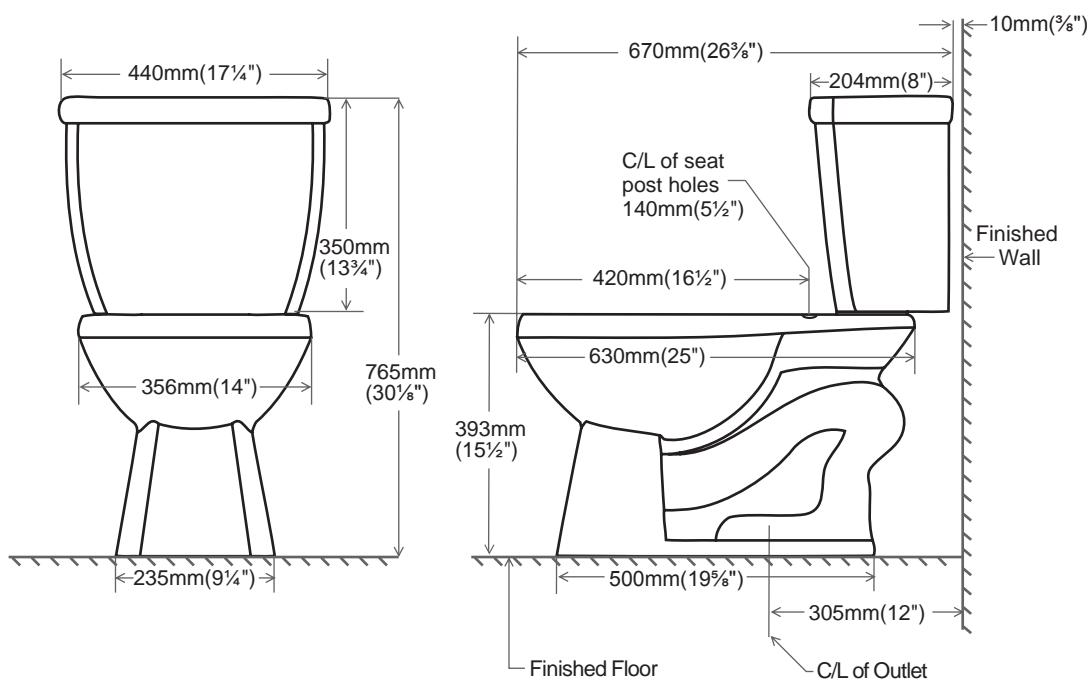




FRONT VIEW

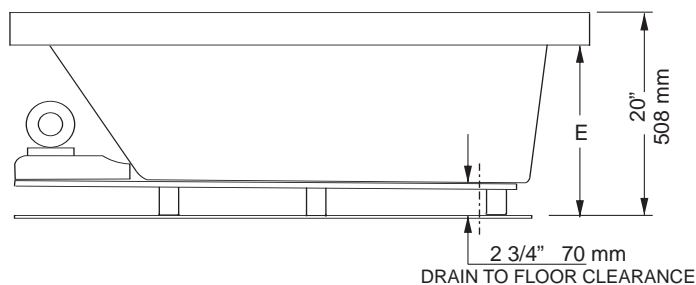

TOP VIEW

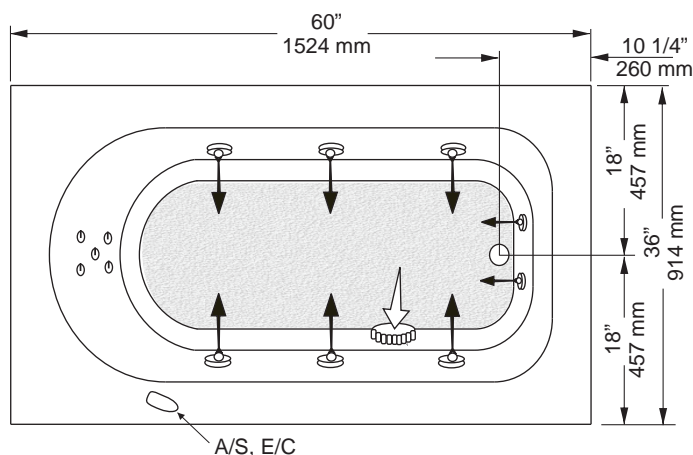

FLANGE THICKNESS	4"	2"	3/8"
E	16"	18"	19 5/8"

NOTES: BATHTUB TO BE INSTALLED ON THE FLOOR SUPPORTED BY THE 5 FEET. SHIM IF REQUIRED TO LEVEL THE BATHTUB FOR ADEQUATE DRAINAGE. WHIRLPOOL AND BLOWER MOTOR PROTRUDE OUTSIDE THE CONFINES OF THE BATHTUB PERIPHERY FOR COMBINATION ONLY.

REFER TO INSTALLATION INSTRUCTIONS FOR ADDITIONAL INFORMATION.

IMPORTANT: Dimensions of fixtures are nominal and may vary $\pm 1/4"$ (6 mm). Weight may vary ± 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

FLANGE PROFILE			
4"	2"	SlimLine™	
BO61	BO612	BO61S	Soaker
WO61	WO612	WO61S	Whirlpool
WB61	WB612	WB61S	Whirlpool - Back jets
AO61	AO612	AO61S	Jet Air®
AB61	AB612	AB61S	Jet Air® - Back jets
UB61	UB612	UB61S	Combination - Back jets
Size: - 60" x 36" x 20"			
1524 mm x 914 mm x 508 mm			

PRODUCT FEATURES & BENEFITS

- ☐ **Soaker**
 - Vacuum formed acrylic reinforced with fiberglass
 - Scratch, stain and fade resistant high gloss finish
 - Patterned bottom
- ☐ **Whirlpool System**
 - 3/4 HP pre-wired self draining pump and motor factory installed on a platform base
 - 6 adjustable flow whirlpool jets, 2 foot jets
 - 5 spinner back jets included in model WB61
 - Deck mounted air switch (A/S)
- ☐ **Jet Air System**
 - 8.5 Amp variable speed blower on a platform base
 - 18 air jets
 - 5 air back jets included in model AB61
 - Deck mounted electronic touch control pad with on/off, speed, and oscillation control (E/C)
- ☐ **Combination - Back Jets**
 - Includes all the whirlpool + jet air features with 6 whirlpool jets, 16 air jets, 5 spinner back jets and 2 foot jets
 - Deck mounted electronic touch control pad with on/off, (air and whirlpool), speed, and oscillation control (E/C)
- ☐ **Optional Accessories**
 - Colour coordinated jets standard; polished chrome or brushed nickel available as an upgrade
 - Factory installed whirlpool heater
 - Tile flange kit KTLEV60
 - Door(s) - Refer to price book / website for coordinating shower door options

GENERAL SPECIFICATIONS

Average Weight	Soaker	64 lb	29 kg
	Whirlpool	106 lb	48 kg
	Jet Air®	75 lb	34 kg
	Combination	117 lb	53 kg
Bathing Well at bottom		22" x 43"	559 x 1092 mm
Capacity Drain to Overflow		52 gall.	236 litres
Min. operating capacity		41 gall.	188 litres
Water Depth Drain to Overflow		13"	330 mm
Drain Opening (dia.)		2"	51 mm
Overflow Opening (dia.)		2 1/2"	64 mm
Drain to Floor Clearance		2 3/4"	70 mm

ELECTRICAL SPECIFICATIONS


Whirlpool pump / motor	3/4HP, 7.5 AMP, 120V
Jet air blower	8.5 AMP, 120V

Compliance Certifications -

Meets or Exceeds the following Specifications:



- CAN/CSA - B45 Series
- CAN/SCA - C22.2 No.218.2 - Hydromassage Standard



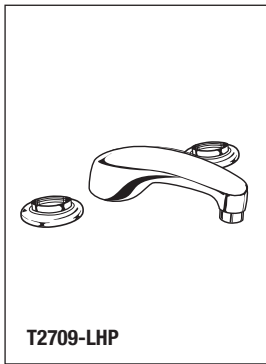

Submitted Model No.: _____

Specific Features: _____

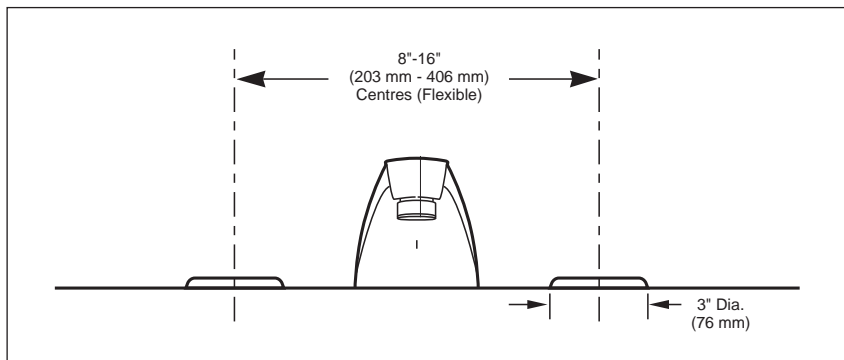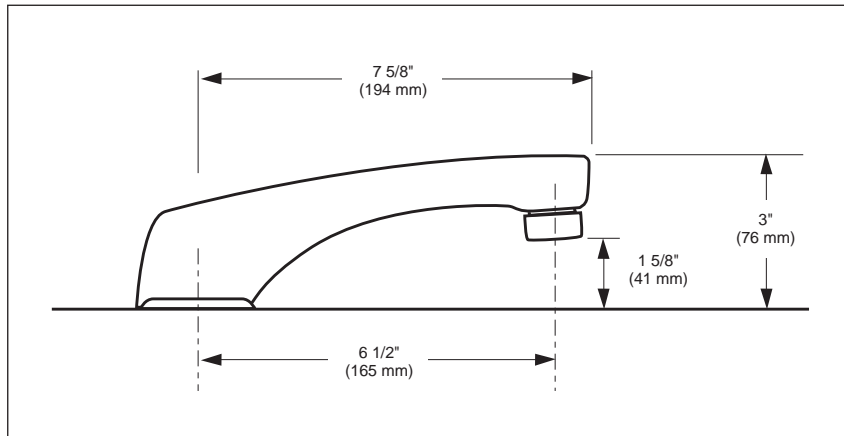

ROMAN TUB/ WHIRLPOOL FAUCET TRIM

■ 3 Piece Trim

STANDARD SPECIFICATIONS:

- Trim Only for two handle Roman Tub faucet for concealed mounting.
- 7" (178 mm) long slip-on rigid spout (rear access for set screw).
- Washerless.
- Three hole installation.
- Deck or ledge mount installation.
- Solid brass spout body.
- Stream straightener.
- Rough-in kit must also be ordered to complete installation. There are separate installation sheets on each rough-in kit if more details are required.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

COMPLIES WITH:

- ASME A112.18.1/CSA B125.1
- CSA Certified



Two Piece Freestanding Collection



CF2002 - Two Piece Freestanding Soaker


size: 68" x 36" x 23"
1727 mm x 914 mm x 584 mm

PRODUCT FEATURES & BENEFITS


- ☐ Vacuum formed acrylic reinforced with fiberglass
- ☐ Scratch, stain and fade resistant high gloss finish
- ☐ Installation friendly two piece design
- ☐ Accepts deck mounted faucet
- ☐ Includes integral pop up drain and overflow
- ☐ Includes leveling feet

TWO PIECE ASSEMBLY


FRONT VIEW

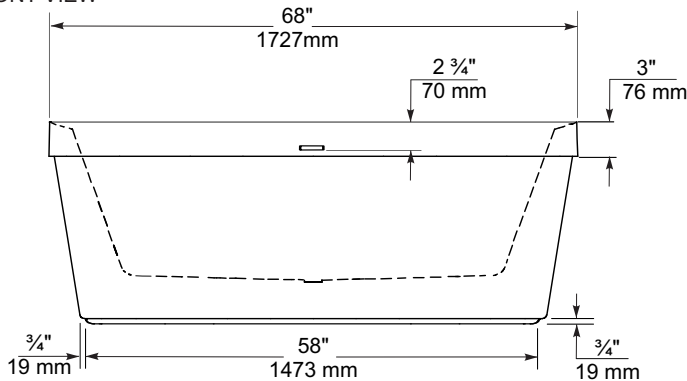


END VIEW

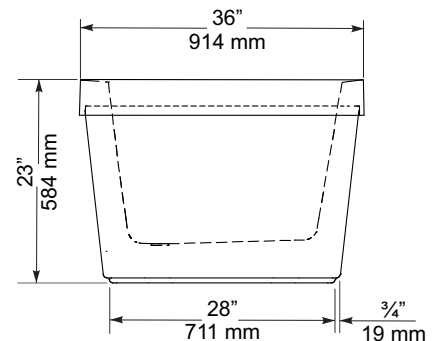

TOP VIEW

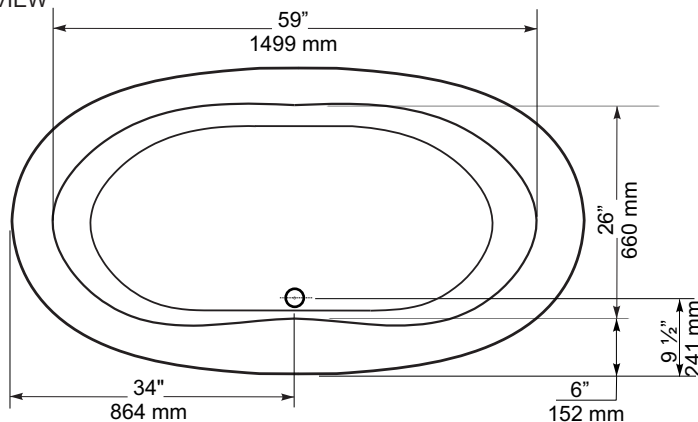

BOTTOM VIEW

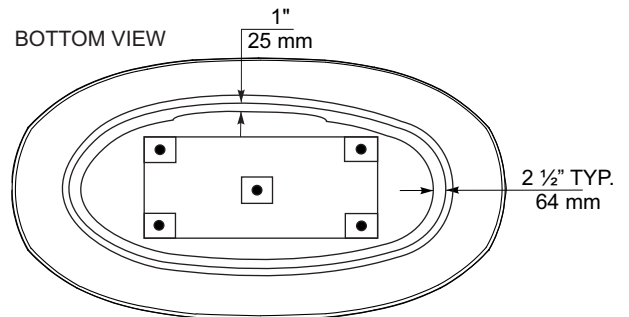

GENERAL SPECIFICATIONS

Average Weight	120 lb	55 kg
Bathing Well at bottom	45" x 21"	1143 x 533 mm
Capacity Drain to Overflow	55 gall.	250 litres
Water Depth Drain to Overflow	16 1/2"	419 mm
Drain Opening (dia.)	2"	51 mm
Overflow Opening	2 1/4" x 1/2"	57 x 13 mm
Drain to Floor Clearance	3 3/4"	95 mm


REFER TO INSTALLATION INSTRUCTIONS FOR ADDITIONAL INFORMATION.
IMPORTANT: Dimensions of fixtures are nominal and may vary $\pm 1/4"$ (6 mm). Weight may vary ± 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications - Meets or Exceeds the following Specifications:
CAN/CSA - B 45.5. & B 45.0.






FRONT VIEW

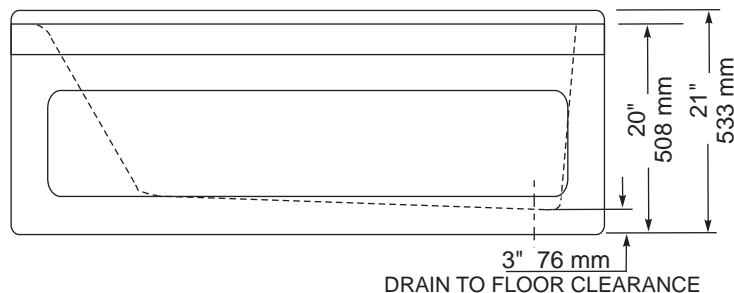

TOP VIEW

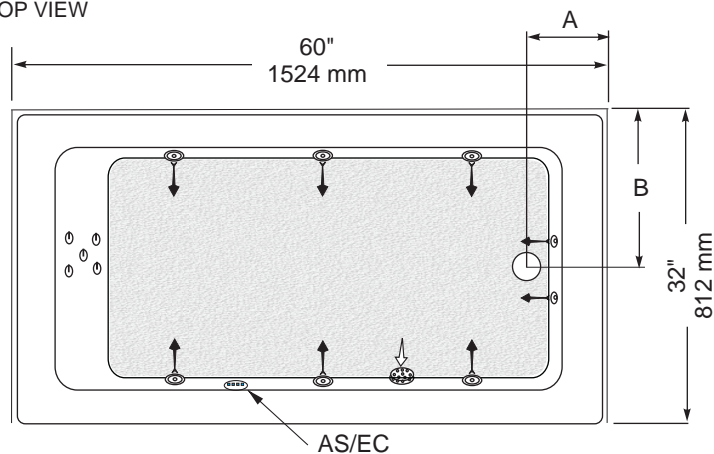

PRODUCT BY PROVINCE	A		B	
BC, AB, SK, MB, NT, NU, YT	8"	203 mm	16"	406 mm
ON, QC, PE, NS, NB, NL	8 ¾"	222 mm	15 ½"	394 mm

NOTES: Please confirm measurements on actual product to ensure proper identification.

Bathtub to be installed on the floor supported by the 5 feet. Shim if required to level the bathtub for adequate drainage. Whirlpool and blower motor protrude outside the confines of the bathtub periphery for combination only.

Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary $\pm 1/4"$ (6 mm). Weight may vary ± 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

BO62L/R	Soaker
WO62L/R	Whirlpool
WB62L/R	Whirlpool - Back jets
AO62L/R	Jet Air®
AB62L/R	Jet Air® - Back jets
UB62L/R	Combination - Back jets
Size - 60" x 32" x 20"	
1524 mm x 813 mm x 508 mm	

* Left or Right is determined by plumbing

PRODUCT FEATURES & BENEFITS

☐ Soaker

- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Built in 1" tile flange on 3 sides
- Removable front access panel on all hydrotherapy models
- Above floor rough in
- Patterned bottom

☐ Whirlpool System

- 3/4 HP pre-wired self draining pump and motor factory installed on a platform base
- 6 adjustable flow whirlpool jets, 2 foot jets
- 5 spinner back jets included in model WB62
- Deck mounted air switch (A/S)

☐ Jet Air System

- 8.5 Amp variable speed blower on a platform base
- 18 air jets
- 5 air back jets included in model AB62
- Deck mounted electronic touch control pad with on/off, speed, and oscillation control (E/C)

☐ Combination

- Includes all the whirlpool + jet air features with 6 whirlpool jets, 16 air jets, 5 spinner back jets and 2 foot jets
- Deck mounted electronic touch control pad with on/off, (air and whirlpool), speed, and oscillation control (E/C)

☐ Optional Accessories

- Colour coordinated jets standard; polished chrome or brushed nickel available as an upgrade
- Factory installed whirlpool heater
- Door(s) - Refer to price book / website for coordinating shower door options

GENERAL SPECIFICATIONS

Average Weight	Soaker	70 lb	32 kg
	Whirlpool	109 lb	49 kg
	Jet Air®	81 lb	37 kg
	Combination	119 lb	54 kg
Bathing Well at bottom		22"x 45"	559 x 1143 mm
Capacity Drain to Overflow		48 gall.	218 litres
Min. operating capacity		40 gall.	182 litres
Water Depth Drain to Overflow		12 5/8"	321 mm
Drain Opening (dia.)		2"	51 mm
Overflow Opening (dia.)		2 ½"	64 mm
Drain to Floor Clearance		3"	76 mm

ELECTRICAL SPECIFICATIONS

Whirlpool pump / motor	3/4HP, 7.5 AMP, 120V
Jet air blower	8.5 AMP, 120V

Compliance Certifications -

Meets or Exceeds the following Specifications:

- CAN/CSA - B45 Series
- CAN/SCA - C22.2 No.218.2 - Hydromassage Standard

